

EGIL

Circuit breaker analyzer



- Suitable for testing timing and travel on all circuit breakers with single interrupter per phase
- Extremely easy-to-use and reliable
- Two separate timing channels for measurement of auxiliary contacts
- Analog measurement channels for travel transducers or general voltage/current measurements
- Static and dynamic resistance measurements along with the SDRM201 accessory

Description

EGIL™, which incorporates benefits gained from experience with our larger instrument, is intended for circuit breakers with one contact per phase. Smaller and simpler, EGIL is equally versatile – and EGIL's price makes it attractive to small power plants. Moreover, it provides an ideal supplementary instrument for maintenance departments at large power companies.

EGIL is designed to test circuit breakers having one main contact per phase. Its three time channels are connected together on one side. Events at parallel contacts equipped with pre-insertion resistors are recorded and displayed simultaneously. There are two separate time channels for measurement of auxiliary contacts. To simplify on-site hookup, EGIL comes with ready-made multi-cable sets for both main and auxiliary contacts.

Coil currents are measured automatically and presented together with other readings immediately after testing on the display window or via the built-in printer. EGIL is easy to use – a built-in sequencer (program unit) sets the instrument automatically for the next sequential breaker operation.


Intended primarily for measuring travel (motion), the optional analog input channel finds many other uses as well. If this channel is not installed, all associated menu commands are hidden.

EGIL with the SDRM option together with the SDRM accessory enables static and dynamic resistance measurements.

EGIL can also be equipped with an optional USB interface for communication with a PC and the CABA Win™ Circuit Breaker Analysis Software.

Features and benefits

1. **Mains voltage changeover switch**, 115/230 V AC.
2. **SDRM (optional)**
Static and dynamic resistance measurement. Interface for the SDRM201 accessory.
3. **Built-in coil current measurement.** Readings are presented on autoscaled graphs.
4. **Sequencer for coil signals** permits delays to be introduced for coil impulses that differ relative to each other.
5. **Three timing channels.** Both main contacts and pre-insertion resistor contacts can be timed on the same channel. Results are presented both graphically and numerically.
6. **Two galvanically isolated timing channels.** Can be used for timing of dry or wet auxiliary contacts.
7. **Optional analog input channel**, intended for measuring travel (motion) or any other analog voltage.
8. **USB (optional)** interface for PC. Supports communication with the CABA breaker analysis software.
9. **Built-in printer** features autoscaling, 114 mm (4,5") wide paper can be changed quickly and easily.
10. **Galvanically isolated sockets** ensure safe, reliable disconnection of operating coil cables before working in or on the breaker.
11. **Breaker state indicator.** Egil measures the state (open or closed) of the breaker, whereupon the sequencer sets the instrument automatically for the next sequential operation.
12. **Buttons for sequence (C, O, C-O, O-C or O-C-O)** settings and to run a print out of measurement results.
13. **Switch used to set the breaker** to the desired state without activating the measurement channels.
14. **Menu-driven procedures** automatically invoke default settings to eliminate time consuming presetting. All menu lines associated with uninstalled optional equipment are hidden to enhance simplicity. For the basic egil unit you simply connect the multi-cable sets and turn the MEASURE knob.
15. **MEASURE knob.** Runs a breaker operation sequence, measuring and recording the results.
16. **AUX 1 & 2 buttons** used for time channels that measure timing of auxiliary contacts. Contact sensing or voltage sensing can be selected.

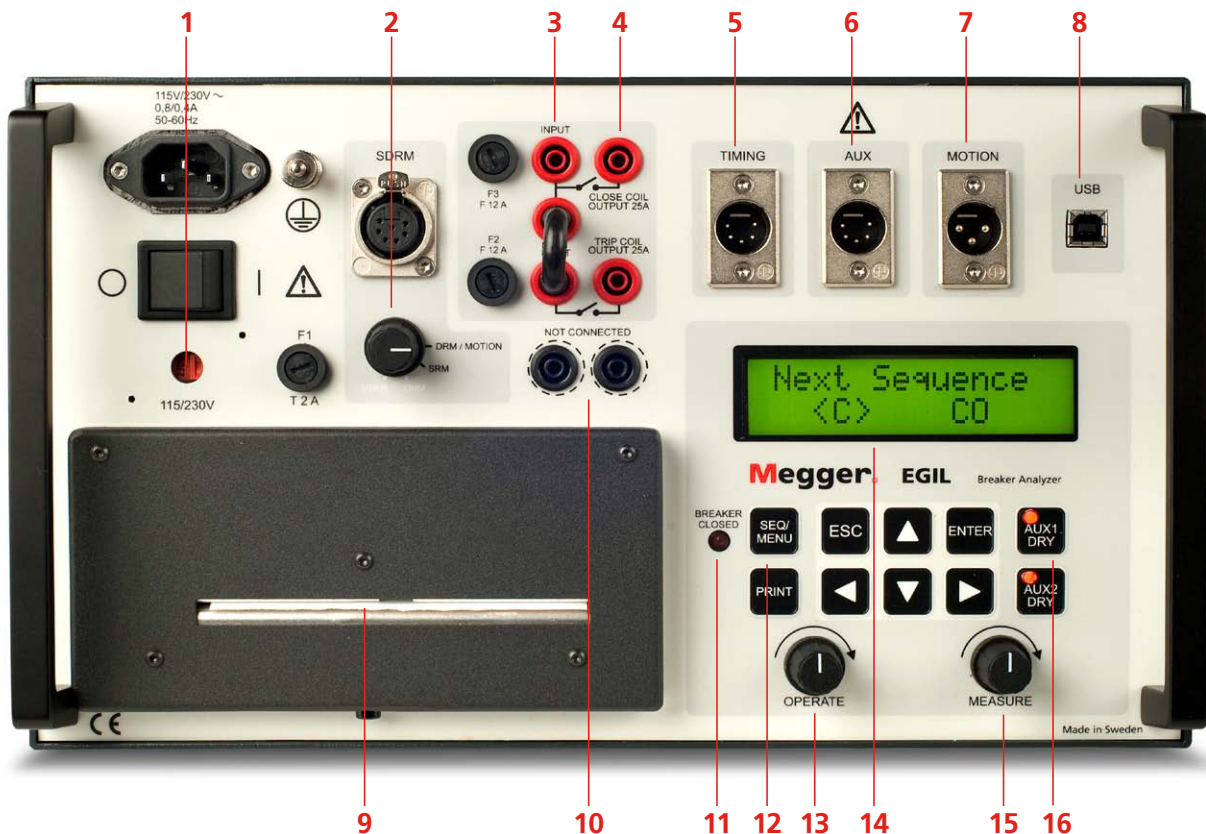

Space for your report data

Space for your comments

Parameters you have selected for breaker operation

Parameters you have selected for travel (motion) measurement

Filtering you have selected for time results

Tabular printout of time measurements at main contacts

Tabular printout of time measurements at auxiliary contacts

Tabular printout of travel (motion) calculations

Graphical printout

Auxiliary contact, close circuit

Main contacts

Auxiliary contact, trip circuit

EGIL
SA-01200 RB2AR2 0900
SA-01210 RB2AR2 0900

TEST REPORT Page: 1()

Date: _____
Session: 9

1. BREAKER DATA

Station:	Line/Compartment:
Breaker ID:	Serial number:
Manufacturer:	Breaker type:

2. TEST DATA

Type of test:	Operator:
Company name:	Reference:

3. COMMENTS

4. GENERAL TEST CONDITIONS

Sequence: CD	Measuring time: 1s	Time base: seconds
Pulse	Length	Delay
Open	0.30s	0.20s
Close	0.14s	
Open		

5. MOTION TEST CONDITIONS

Nominal stroke length: 135.0mm

Closing speed calculation points

Upper point: at close of main contact
Lower point: 10.0ms before upper point

Opening speed calculation points

Upper point: at open of main contact
Lower point: 10.0ms after upper point

6. TIMING RESULTS

L1, L2, L3: Phase 1, 2 and 3, Main contacts
X1, X2: Auxiliary contact 1 and 2

Presented events:
Initial contact touch at closure and final contact separation at opening
Opening bounces < 10ms are suppressed

Page: 2()		
L1	L2	L3
123.0ms Close	125.2ms Close	124.0ms Close
251.5ms Open	249.8ms Open	249.7ms Open
X1	X2	
180.5ms Open	133.3ms Close	
278.6ms Close	250.7ms Open	

Timing calculations

Parameter/Phase	L1	L2	L3
Closing Time	123.0ms	125.2ms	124.0ms
Opening Time	251.5ms	249.8ms	249.7ms
Time C-O (On time)	126.3ms		

Difference between phases

Closing Time	1.4ms
Opening Time	1.0ms

7. MOTION RESULTS

Parameter/Phase	L1	L2	L3
Closing speed	3.4m/s		
Opening speed	2.2m/s		
Stroke	141.1mm		

8. GRAPH

L1, L2, L3: Phase 1, 2 and 3, Main contacts
X1, X2: Auxiliary contact 1 and 2

I: Current -0.000A Scale: 2A/d 16.00A
M: Motion -28.0mm Scale: 20mm/d 228.0mm

Example of report printed out on the built-in printer. Close-Open operation. Time, coil currents and travel (motion) were measured. (Travel measurement is optional.) The above example is 50% of actual size.

Application

EGIL is intended primarily for testing high-voltage circuit breakers at medium-level voltages. There must not, however, be more than one break per phase since the time channels are not galvanically isolated. Contact times are recorded for main contacts, pre-insertion resistor contacts and auxiliary contacts. Coil currents are also recorded.

Besides the actual measurement values several parameters according to IEC standards are calculated and shown in the report, e.g. closing and opening time, difference between phases, over-travel, CO and OC time (and others).

Application example

IMPORTANT

Read the User's manual before using the instrument.

1. Ground EGIL using the included ground cable. Make certain that the circuit breaker is closed and grounded on both sides.
2. Connect the main contact cable set to EGIL and the circuit breaker.
3. Connect the auxiliary contact cable set to the a- and b-contacts on the operating mechanism.
4. Connect the EGIL sequencer to the close- and trip-coils and to the auxiliary voltage.
5. Remove the breaker's ground connection on one side.
6. You are now ready to proceed with the test. Simply turn the MEASURE rotary switch and read the results.

Specifications

Specifications are valid at nominal input voltage and an ambient temperature of +25°C, (77°F). Specifications are subject to change without notice.

Environment

Application field The instrument is intended for use in medium-voltage substations and industrial environments.

Temperature

Operating 0°C to +50°C (32°F to +122°F)

Storage & transport -40°C to +70°C (-40°F to +158°F)

Humidity 5% – 95% RH, non-condensing

CE-marking

EMC 2004/108/EC

LVD 2006/95/EC

General

Mains voltage 115/230 V AC (switchable), 50/60 Hz

Power consumption 100 VA (max)

Dimensions

Instrument 360 x 210 x 190 mm (14.2" x 8.3" x 7.5")

Transport case 420 x 300 x 230 mm (16.5" x 11.8" x 9.0")

Weight 6.3 kg (14 lbs). 10 kg (22 lbs) with accessories and transport case

Display LCD

Available languages English, German, French, Spanish, Swedish

Measurement section

Time measurement

Measurement time 1 to 100 s

Resolution 0.1 to 10 ms

Number of channels 3 with common ground

Time base inaccuracy 0.05% of the reading ± resolution

Status thresholds

Closed < 10 Ω ±20%

Resistor 10 Ω ±20% to 3 kΩ ±20%

Open > 3 kΩ ±20%

Open circuit voltage 24 V ±20%

Short circuit current 100 mA ±20%

AUX 1&2

Number of channels 2, galvanically isolated

Contact-sensing (Dry)

Status thresholds

Closed < 600 Ω ±30%

Open > 600 Ω ±30%

Open circuit voltage 20 V ±20% DC

Short circuit current 25 mA ±20%

Voltage sensing (Wet)

Status thresholds

Open indication < 8 V (polarity insensitive)

Close indication > 13 V (polarity insensitive)

Working voltage 250 V AC/DC

Current measurement

Range ±25 A per channel

Resolution 25 mA

Inaccuracy 1% of the reading ±100 mA

Working voltage 250 V AC/DC

Breaker operation

Sequences C, O, C-O, O-C, O-C-O

Continuous current 5 A

Max current 25 A during 300 ms, rest time 1 min

Contact function Two independent control functions

Contact characteristics Non bouncing, closing time max. 0.1 ms

Make/Break capacity 25 A, 250 V (AC or DC) per contact function

Start breaker operation By rotary switch

Pulse length Adjustable in steps of 10 ms

Pulse delay Adjustable in steps of 10 ms

Working voltage 250 V AC/DC

Motion (optional)

Number of channels 1 independent

Max cable length 10 m (33 ft)

Input

Range -4 V to +4 V

Resolution 2 mV

Inaccuracy 1% of the measurement range

Transducer resistance 1 kΩ to 5 kΩ

Input impedance 150 kΩ

Output

Open circuit voltage 4,095 V ±4 mV

Short circuit current 115 mA

Printout

Type of printout Graphic and numeric

Printer Thermal printer with fixed print head

Graphic resolution 8 dots/mm – 203 dpi

Paper width 114 mm (4.5")

Optional Accessories



The SDRM201 is intended to use for both static and dynamic resistance measurements (SRM and DRM) on high voltage circuit breakers or other low resistive devices



Cable reels, 20 m (65.5 ft), 4 mm stack-able safety plugs



Multicable sets GA-00160 and GA-00170 and cable set GA-00082



The SDRM Cable



Transducer cables GA-00041 and GA-00042



Current cables for SDRM201, the red cable is 3.0 m (9.8 ft) and the black one is 0.5 m (1.6 ft)



Extension cable XLR, GA-01005



Extension cable XL, GA-00150



Linear transducer, TLH 225



Linear transducer, TS 25



Linear transducer, LWG 150



Rotary transducer, Novotechnic IP6501 (analog)



Universal support



Switch magnetic base



Rotary transducer mounting kit



Voltage divider, VD401

Ordering information

Item	Art. No.	Item	Art. No.
EGIL Basic unit	BM-19090	Switch magnetic base	XB-39013
Incl:		Cables	
Time measurement cables	GA-00160, GA-00170	Cable reel	
Cable set for sequencer	GA-00082	20 m (65.5 ft), 4 mm stackable safety plugs	
Transport case	GD-00190	Black	GA-00840
Egil with analog input channel and USB port	BM-19093	Red	GA-00842
Incl:		Yellow	GA-00844
CABA Win	BL-8206X	Green	GA-00845
Time measurement cables	GA-00160, GA-00170	Blue	GA-00846
Cable set for sequencer	GA-00082	Cable sets	
Transducer cable XLR-open	GA-00041	The cable sets consist of 8 cables with clamps and 4 mm stackable safety plugs	
1 m (3.2 ft)		8 x 5 m, (16.4 ft)	GA-00231
Transducer cable XLR-XLR	GA-00042	8 x 10 m, (32.8 ft)	GA-00241
7.5 m (24.6 ft)		8 x 15 m, (49.2 ft)	GA-00251
Transport case	GD-00190	Extension cables, XLR female to male	
Egil with SDRM option and USB port	BM-19095	For analog input, 10 m (32.8 ft)	GA-01005
Incl:		For time measurement of main contacts, 10 m (32.8 ft)	GA-00150
CABA Win	BL-8206X	Open analog cable	
Time measurement cables	GA-00160, GA-00170	For customized analog transducer connection	GA-01000
Cable set for sequencer	GA-00082	XLR to 4 mm safety plugs	
Transducer cable XLR-open	GA-00041	For customized analog transducer connection	GA-00040
1 m (3.2 ft)		Other	
Transducer cable XLR-XLR	GA-00042	VD401	
7.5 m (24.6 ft)		Voltage divider, ratio 400/1	
Transport case	GD-00190	(for TM1600 and EGIL with analog channel)	BL-90070
Upgrade		Thermopaper, 114 mm, 30 m	GC-00030
From BM-19090 to BM-19093	BM-90060	Cable organizer, Hook and loop fastener, 10 pcs	AA-00100
From BM-19093 to BM-19095	BM-90073		
Optional accessories			
CABA Win			
Circuit breaker analysis software			
Incl. USB cable	BL-8206X		
SDRM201	CG-90250		
Extension cables for SDRM201			
10 m (33 ft) extension	GA-12810		
7.5 m (24.6 ft) extension	GA-12815		
Transducers – Linear			
TLH 500	XB-30020		
LWG 225	XB-30117		
TS 150	XB-30030		
TS 25	XB-30033		
Transducers – Rotary			
Novotechnic IP6501	XB-31010		
Flex coupling for IP6501	XB-39030		
Transducer mounting kits			
Universal kits			
Rotary transducer mounting kit			
For transducers XB-31010 and XB-39130	XB-51010		
Universal transducer mounting kit			
for linear and rotary transducers	XB-51020		
Ready-to-use-kits – Rotary			
Incl. transducer XB-31010, mounting kit XB-51010	XB-71010		
Transducer mounting accessories			
Universal support	XB-39029		